

5-30-00
A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL
UNDER 37 CFR 1.53(b)

Address to: Box Patent Application Assistant Commissioner for Patents Washington, DC 20231	Attorney Docket No.	STL9-2000-0034US1
	Inventor(s)	Brent C. Hawks, et al
	Express Mail Label No.	EL290559082US
	Filing Date	May 25, 2000

Title of Application: METHOD OF, SYSTEM FOR, AND COMPUTER PROGRAM PRODUCT FOR PROVIDING A DATA STRUCTURE FOR CONFIGURING CONNECTIONS BETWEEN A LOCAL WORKSTATION FILE SYSTEM AND A REMOTE HOST FILE SYSTEM

Transmitted with the patent application are the following:

- 28 Page(s) Specification, Claims and Abstract
12 Page(s) Formal drawings
3 Page(s) Declaration and Power of Attorney (without signatures)
 Page(s) Assignment of the Invention to International Business Machines Corporation (Rec. Cover sheet in Duplicate)
 3 Page(s) Information Disclosure Statement (IDS/PTO 1449) (copies of citations not included in number of pages)
 X Copies of IDS citations
 X Return Receipt Postcard (MPEP 503).

Fee Calculation:

	Claims		Extra	Rate	Fees
<i>Basic Fee</i>					\$690.00
<i>Total Claims</i>	8	-20 =	0	x \$18.00	
<i>Independent Claims</i>	2	-3 =	0	x \$78.00	
<i>Multiple Dependent</i>				+\$260.00	
TOTAL					\$ 690.00

 X Please charge my Deposit Account No. 09-0460 in the amount of \$ 690.00. A duplicate copy of this sheet is attached.

 X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any

overpayment to Deposit Account 09-0460. A duplicate copy of this sheet is attached.

 X Any filing fees under 37 CFR 1.16 for the presentation of extra claims.

 X Any patent application processing fees under 37 CFR 1.17.

EXPRESS MAIL CERTIFICATE

I hereby certify that the above paper/fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Date of Deposit: May 25, 2000

Person Mailing paper/fee: Jeanette Berry Durbin

Signature: Jeanette Berry Durbin

Respectfully submitted,
Brent C. Hawks, et al.

Prentiss W. Johnson

Prentiss W. Johnson,
Registration No. #33,123
Attorney for Applicant(s)
Telephone (408) 463-5673
IBM Corporation
Intellectual Property Law
555 Bailey Avenue (J46/G467)
San Jose, CA 95141-1003

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DOCKET:STL9-2000-0034US1

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"Method of, System For, and Computer Program Product for Providing a Data Structure for Configuring Connections Between a Local Workstation File System and a Remote Host File System"

the specification of which (check one)

X is attached hereto.

was filed on _____
as Application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>None</u>			<u>Yes</u>	<u>No</u>
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>None</u>		
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DOCKET: STL9-2000-0034US1

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Romualdas Strimaitis (#35,697)	Christopher A. Hughes (#26,914)
Timothy M. Farrell (#37,321)	Edward A. Pennington (#32,588)
Ingrid M. Foerster (#36,511)	John E. Hoel (#26,279)
Prentiss W. Johnson (# 33,123)	Joseph C. Redmond, Jr. (#18,753)

Send correspondence to:

Prentiss Wayne Johnson
Attorney
IBM Corporation
Intellectual Property Law
555 Bailey Avenue (J46/G467)
San Jose CA 95141-1003

Direct Telephone Calls to: (name and telephone number) Prentiss W. Johnson, 408-463-5673

Full name of sole or first joint-inventor: Brent C. Hawks

Inventor's signature:

Date:

Residence: 310 Howard Court, Hollister, California 95023

Citizenship: USA

Post Office Address: Same

Full name of second joint-inventor: Edmund Johnson

Inventor's signature:

Date:

Residence: 26942 Puebloneuvo, Mission Viejo, California 92691

Citizenship: USA

Post Office Address: Same

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

DOCKET: STL9-2000-0034US1

Full name of third joint-inventor: Gary I. Mazo

Inventor's signature:

Date:

Residence: 2861 Ruby Terrace, San Jose, California 95148

Citizenship: USA

Post Office Address: Same

Full name of fourth joint-inventor: Peter A. Nicholls

Inventor's signature:

Date:

Residence: 34 Hoseyhill Crescent, Toronto Ontario, Canada M1S 2X4

Citizenship: Canada

Post Office Address: Same

Full name of fifth joint-inventor: Ira L. Sheftman

Inventor's signature:

Date:

Residence: 7442 Tulare Hill Drive, San Jose, California 95139

Citizenship: USA

Post Office Address: Same

Express Mail Label # EL290559082US

SPECIFICATION

IBM Docket No. STL9-2000-0034US1

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN that We, Brent Hawks of Hollister, California and citizen of the United States, Edmund Johnson of Mission Viejo, California, and citizen of the United States, Gary Mazo of San Jose, California and citizen of the United States, Peter Nicholls of Toronto, Ontario, Canada and citizen of Canada and Ira Sheftman of San Jose, California and citizen of the United States, have invented new and useful improvements in

**METHOD OF, SYSTEM FOR, AND COMPUTER PROGRAM PRODUCT FOR
PROVIDING A DATA STRUCTURE FOR CONFIGURING CONNECTIONS
BETWEEN A LOCAL WORKSTATION FILE SYSTEM AND A REMOTE HOST
FILE SYSTEM**

of which the following is a specification:

1
2
3 **METHOD OF, SYSTEM FOR, AND COMPUTER PROGRAM PRODUCT FOR**
4 **PROVIDING A DATA STRUCTURE FOR CONFIGURING CONNECTIONS**
5 **BETWEEN A LOCAL WORKSTATION FILE SYSTEM AND A REMOTE HOST**
6 **FILE SYSTEM**

7
8
9
10 **CROSS-REFERENCE TO RELATED APPLICATIONS**

11
12 Application Serial Number _____, filed concurrently herewith on May 25, 2000
13 for **METHOD OF, SYSTEM FOR, AND COMPUTER PROGRAM PRODUCT FOR**
14 **PROVIDING A USER INTERFACE FOR CONFIGURING CONNECTIONS**
15 **BETWEEN A LOCAL WORKSTATION FILE SYSTEM AND A REMOTE HOST**
16 **FILE SYSTEM** (IBM Docket STL9-2000-0033), currently co-pending, and assigned to the
17 same assignee as the present invention. The foregoing copending application is incorporated
18 herein by reference.

19
20
21
22 A portion of the Disclosure of this patent document contains material which is subject
23 to copyright protection. The copyright owner has no objection to the facsimile reproduction by
24 anyone of the patent document or the patent disclosure, as it appears in the Patent and
25 Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates in general to computer file systems, and more particularly to a data structure for configuring connections between a file system residing on a local workstation and a file system residing on a remote host system.

2. Description of the Related Art

Connecting a workstation to a host, known as host workstation connectivity, may be a relatively straight forward terminal connection or emulation. It may also be a rather complex connection such as connecting, mapping, and converting files and directories from a host file system to a workstation file system to support a scenario such as Remote Edit/Compile/Debug.

Remote Edit/Compile/Debug provides a workstation environment for performing the edit, compile, and debug tasks associated with host application development. Application parts, such as COBOL source code, COBOL copy books, and host JCL, are kept in partitioned datasets (PDS) or partitioned datasets extended (PDSE) on the host. These files may be accessed and used through a project, such as an IBM® Multiple Virtual Storage (MVS®) project (IBM® and MVS® are registered trademarks of International Business Machines Corporation in the United States, other countries, or both.). The names appearing on the workstation for the host PDS and PDSE members depend upon how the MVS drives are defined during Remote Edit/Compile/Debug setup.

Remote Edit/Compile/Debug can provide many benefits. Host data sets may be accessed from the workstation. After completing the required configuration, a workstation

project can connect to PDS or PDSE data sets on the host and include members in the project. These host files may then be accessed as if they were workstation files. Host files may be edited and compiled from the workstation. Jobs may be submitted, monitored, and debugged from the workstation.

However, using the Remote Edit/Compile/Debug for host development requires communications to be configured at the workstation and at the host. This configuration may be quite complex as the following configuration example illustrates.

Host configuration to support connectivity for Remote Edit/Compile/Debug may comprise the following steps:

1. Install, configure, and start a communications protocol on the host, such as the Transmission Control Protocol/Internet Protocol (TCP/IP).
2. Install and configure a remote execution server on the host, such as Remote Execution Server for MVS.
3. Further configure TCP/IP to automatically start the remote execution server. For example, by adding the following statements to a data set PROFILE.TCPIP:

AUTOLOG

RXPROC

ENDAUTOLOG

4. Install and configure a Network File System (NFS) server. Such configuration may be accomplished by modifying an NFS site attributes data set such that a default parameter 'nopcnfsd' is changed to 'pcnfsd'.
5. To enable file extension mapping, the site attributes data set may be further modified by changing the default parameter 'sfilemax=0' to 'sfilemax=1', and by changing the default parameter 'nofileextmap' to 'fileextmap'. A default file extension mapping data set may be specified by adding the parameter 'sidefile(mapping_dsn)', where mapping_dsn is the name of the file extension mapping data set. The file extension mapping data set must have a name of the form hlq.NFS.MAPPING, where hlq can be any high level qualifier,

and it must be allocated with DCB=(recfm=fb, lrecl=80, blksize=400). Such a file extension mapping data set may contain either a default or a user-specified mapping such as the following mappings:

```
col 1
|
V
#NFS.MAPPING
**.SYSADATA .ADT
**.COBOL .CBL
**.PLIOPT .PLI
**.PLI .PLI
**.COBCOPY .CPY
**.OBJ .OBJ
**.LOAD .EXE
**.CLIST .CMD
**.SIGYCLST .CMD
**.CNTL .JCL
**.JCL .JCL
**.LISTING .LST
**.OUTLIST .OUT
```

6. Install the Remote Edit/Compile/Debug host component.

7. Start TCP/IP and NFS server .

Workstation configuration to support connectivity for Remote Edit/Compile/Debug may comprise the following additional steps:

1. Install, configure, and start TCP/IP on the workstation.

2. Install and configure the NFS Client.

3. Start the NFS client with the following command:

1 net use m: \\yourhost\youruser,text,crlf yourpassword /user:youruser
2 where youruser and yourpassword are a userid and password and where m is an
3 available drive letter.
4 4. If the connection to the host was successful, disconnect before the next step using the
5 disconnect command:
6 net use m: /d
7 5. To enable file extension mapping, reconnect to the host with mapping by specifying
8 fileextmap with the following command:
9 net use m: \\yourhost\youruser,text,crlf,fileextmap yourpassword /user:youruser
10 6. Verify that the remote execution server is started by entering the following command:
11 rsh yourhost -lyouruser/password time
12 which should provide the output of the time command if the remote execution server is
13 running.

14
15 As the above demonstrates, conventional configuration of host workstation connectivity
16 is complex with many opportunities for errors. Such complexity may also affect the
17 performance and reliability of conventional host workstation connectivity. Thus, there is a
18 clearly felt need for a method of, system for, and computer program product for providing an
19 improved easy-to-use and more reliable data structure for configuring connections between a
20 file system residing on the local workstation and a file system residing on a remote host system.

SUMMARY OF THE INVENTION

The present invention provides a data structure for configuring connections from a local workstation between a file system residing on the local workstation and a file system residing on a remote host system. The data structure provides for such configuration by allowing the user to specify the host system, specify a host directory path within the host file system, and specify a mapping between a file within the host directory path on the host file system and a file on the local file system. After such configuration, the user may access the host file system file in the same manner as a local file system file.

One aspect of a preferred embodiment of the present invention encodes information describing a file system connection between a local system and a host system in a metalanguage format comprising one or more tags, each tag having an identifier and a set of one or more attributes, wherein the encoded information comprises a file system connection descriptor which can be parsed according to the metalanguage tags.

Another aspect of a preferred embodiment of the present invention provides a data structure embodied in a computer-readable storage medium, said data structure representing information describing a file system connection between a local file system located on a local system and a host file system located on a host system, wherein said data structure comprises a file system connection descriptor, said file system connection descriptor comprising: a local system data structure representing the local file system; a host system data structure representing the host file system; and a mapping data structure representing a mapping between the local file system and the host file system.

Another aspect of a preferred embodiment of the present invention provides a mapping data structure comprising a local file extension data structure storing a local file extension; a host file pattern data structure storing a pattern describing a host file to which the local file extension will be applied; and a transfer type data structure storing a transfer type that defines

1 how data will be transferred between the host system and the local system for this mapping.

2
3 Another aspect of a preferred embodiment of the present invention provides a mapping
4 data structure comprising a host codepage data structure storing an identification of a host
5 codepage in which data in the host file is encoded; and a local-codepage data structure storing
6 an identification of a local codepage in which data in a local file is encoded.

7
8 Another aspect of a preferred embodiment of the present invention provides a host
9 system data structure comprising a data structure storing an identification of the host system; a
10 data structure storing an identification of a user of the host system; a data structure storing an
11 identification of a preferred drive on the local system; and a data structure storing an indication
12 that the preferred drive be automatically connected by default when a remote connection is
13 established with the host system.

14
15 Another aspect of a preferred embodiment of the present invention provides a host
16 system data structure comprising a data structure storing an identification of a list of qualifier
17 data structures, wherein each qualifier data structure stores a qualifier name, a name identifying
18 a directory on the host system, and an identification of file attributes of a file located in the host
19 system directory

20
21 Another aspect of a preferred embodiment of the present invention encodes the file
22 system connection descriptor in a tagged metalanguage document comprising one or more tags,
23 each tag having an identifier and a set of one or more attributes.

24
25 Another aspect of a preferred embodiment of the present invention provides that the
26 tagged metalanguage is Extensible Markup Language (XML).

27
28 A preferred embodiment of the present invention has the advantage of providing an
29 improved data structure for configuring connections between a file system residing on the local

1 workstation and a file system residing on a remote host system.

2
3 A preferred embodiment of the present invention has the further advantage of storing
4 and providing a mapping between a host directory or directories and a local drive.

5
6 A preferred embodiment of the present invention has the further advantage of storing
7 and providing a mapping between a host directory path and a local directory path.

8
9 A preferred embodiment of the present invention has the further advantage of storing
10 and providing a mapping between a host code page in which data in the host file is represented
11 and a local code page in which data in the local file is represented after being converted from
12 the host code page representation.

13
14 A preferred embodiment of the present invention has the further advantage of storing
15 and providing a data transfer type associated with files contained the host directory path.

16
17 A preferred embodiment of the present invention has the further advantage of storing
18 and providing a local file extension type, a pattern describing host files to which the local file
19 extension will be applied, and a data transfer type applicable to mapped host files conforming
20 to the pattern.

21
22 A preferred embodiment of the present invention has the further advantage of
23 supporting multiple host file system formats.

24
25 A preferred embodiment of the present invention has the further advantage of
26 supporting concurrent connections to multiple host file systems.

27
28 A preferred embodiment of the present invention has the further advantage of
29 supporting a mapping to multiple types of host files.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the Description of the Preferred Embodiment in conjunction with the attached Drawings, in which:

Figure 1 is a block diagram of a distributed computer system used in performing the method of the present invention, forming part of the apparatus of the present invention, and which may use the article of manufacture comprising a computer-readable storage medium having a computer program embodied in said medium which may cause the computer system to practice the present invention;

Figures 2, 3, 4 and 5 are flowcharts illustrating the operations preferred in carrying out a preferred embodiment of the present invention;

Figures 6, 7, 8, 9, 10, and 11 are graphical user interfaces preferred in carrying out a preferred embodiment of the present invention; and

Figures 12, 13, 14, 15, 16, and 17 are data structures preferred in carrying out a preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to **Figure 1**, there is depicted a graphical representation of a data processing system **8**, which may be utilized to implement the present invention. As may be seen, data processing system **8** may include a plurality of networks, such as Local Area Networks (LAN) **10** and **32**, each of which preferably includes a plurality of individual computers **12** and **30**, respectively. Of course, those skilled in the art will appreciate that a plurality of Intelligent Work Stations (IWS) coupled to a host processor may be utilized for each such network. Each said network may also consist of a plurality of processors coupled via a communications medium, such as shared memory, shared storage, or an interconnection network. As is common in such data processing systems, each individual computer may be coupled to a storage device **14** and/or a printer/output device **16** and may be provided with a pointing device such as a mouse **17**.

The data processing system **8** may also include multiple mainframe computers, such as mainframe computer **18**, which may be preferably coupled to LAN **10** by means of communications link **22**. The mainframe computer **18** may also be coupled to a storage device **20** which may serve as remote storage for LAN **10**. Similarly, LAN **10** may be coupled via communications link **24** through a sub-system control unit/communications controller **26** and communications link **34** to a gateway server **28**. The gateway server **28** is preferably an IWS which serves to link LAN **32** to LAN **10**.

With respect to LAN **32** and LAN **10**, a plurality of documents or resource objects may be stored within storage device **20** and controlled by mainframe computer **18**, as resource manager or library service for the resource objects thus stored. Of course, those skilled in the art will appreciate that mainframe computer **18** may be located a great geographic distance from LAN **10** and similarly, LAN **10** may be located a substantial distance from LAN **32**. For example, LAN **32** may be located in California while LAN **10** may be located within North Carolina and mainframe computer **18** may be located in New York.

1 Software program code which employs the present invention is typically stored in the
2 memory of a storage device **14** of a stand alone workstation or LAN server from which a
3 developer may access the code for distribution purposes, the software program code may be
4 embodied on any of a variety of known media for use with a data processing system such as a
5 diskette or CD-ROM or may be distributed to users from a memory of one computer system
6 over a network of some type to other computer systems for use by users of such other systems.
7 Such techniques and methods for embodying software code on media and/or distributing
8 software code are well-known and will not be further discussed herein.
9

10 As will be appreciated upon reference to the foregoing, it is often desirable for a user to
11 perform host application development on a workstation **12** in lieu of performing the application
12 development on the host **18** itself. Remote Edit/Compile/Debug provides such a workstation
13 environment for performing the edit, compile, and debug tasks associated with host application
14 development. Host application parts, such as COBOL source code, COBOL copy books, and
15 host JCL, may be stored in PDS or PDSE data sets on storage device **20** connected to the host
16 **18**. The Remote Edit/Compile/Debug workstation environment allows these files to be
17 accessed and used on the workstation **12**. The present invention provides for such access and
18 use of host files on the workstation **12** by providing a data structure for configuring a
19 connection such that files and directories may be mapped and converted from the host **18** to the
20 workstation **12** to support a scenario such as the Remote Edit/Compile/Debug.
21

22 A preferred embodiment of the present invention is implemented as a Remote System
23 Connection Manager (RSC Manager). The RSC Manager provides a user interface and data
24 structure for configuring connections from a local workstation between a file system residing
25 on the local workstation and a file system residing on a remote host system. The interface and
26 data structure provide for such configuration by allowing the user to specify and store the host
27 system, a host directory path within the host file system, and a mapping between a file within
28 the host directory path on the host file system and a file on the local file system. After such
29 configuration, the user may access the host file system file as if it is a local file system file.

Referring first to **Figure 2**, there is shown a flowchart **200** implementing the steps preferred in carrying out the preferred embodiment of the invention. After the start of the process **210**, process block **220** allows the user to specify the host system through the use of a Add/Modify Connection Wizard which displays the sequence of Add/Modify dialogs **600**, **700**, and **800** shown in **Figures 6, 7, and 8**, respectively. After the user has specified the host system, process block **230** allows the user to specify a host directory path from which files will be transferred and the type of transfer through the use of a Directory Setup Wizard which displays the Directory Setup dialog **900** shown in **Figure 9**. After the user has specified the host directory path, process block **240** allows the user to specify a mapping between the host directory path and a file on the local file system through the use of a Mapping Setup Wizard which displays the Mapping Setup dialog **1000** shown in **Figure 10**. In response to this mapping, process block **250** displays a representation of the system connection in a Remote System Connections Manager window **1100** as shown in **Figure 11**. Thereafter, process block **260** stores the specification of the remote system connection in a system data structure or file, preferably an XML file, **1300-1800** shown in **Figures 12, 14, 15, 16, and 17**, respectively. Process block **270** then uses this remote system connection specification to access the host file system as if it is a local file. The process then ends **280**.

Referring now to **Figure 3**, flowchart **222** illustrates process blocks **224**, **226**, and **228** which are an expansion of the function of process block **230** of **Figure 2**. Process block **224** allows the user to identify the user of the host system through the use of entry fields **670** and **675** as shown in **Figure 6**. Process block **226** allows the user to specify a mapping between a host code page and a local code page through the use of entry fields **710** and **730** as shown in **Figure 7**. Process block **228** allows the user to specify a mapping between a host directory path and a local drive through the use of entry field **750** as shown in **Figure 7**.

Referring now to **Figure 4**, flowchart **242** illustrates process blocks **244**, **246**, and **248** which are an expansion of the function of process block **240** of **Figure 2**. Process block **244** allows the user to specify a local file extension type through the use of entry field **1010** as

1 shown in **Figure 10**. Process block **246** allows the user to specify a pattern describing host
2 files to which the local file extension will be applied through the use of entry field **1030** as
3 shown in **Figure 10**. Process block **248** allows the user to specify a data transfer type
4 applicable to mapped host files conforming to the pattern through the use of entry field **1050** as
5 shown in **Figure 10**.

6
7 Referring now to **Figure 5**, flowchart **272** illustrates process blocks **274**, **276**, and **278**
8 which are an expansion of the function of process block **250** of **Figure 2**. Process block **274**
9 displays in a first portion **1110** of a window **1100**, as shown in **Figure 11**, a visual indicia **1108**
10 representing the host system **18**. Process block **276** displays in a second portion **1104** of the
11 window **1100** a visual indicia **1140** representing the host directory. Process block **278** displays
12 in a third portion **1106** of the window **1100** a visual indicia **1160** representing the mapping
13 between the file **1154** within the host directory path on the host file system **20** and the file **1150**
14 on the local file system **14**.

15
16 Referring back now to **Figures 6** through **11**, the sequence of dialogs will now be
17 presented in greater detail through a user scenario. In response to the user requesting or
18 indicating a need for a new remote connection, an Add/Modify Connection Wizard window
19 **600** is displayed to the user. In the preferred embodiment, this window **600** is structured as a
20 tabbed notebook **610** from which the user may select a tab **620** to select a particular dialog **630**
21 associated with that tab **620**. The user is first presented with or may select the Host and User
22 dialog **630**. This Host and User dialog **630** provides entry fields allowing the user to enter a
23 host system name, a nickname selected by the user for this host system name, the user's user
24 identification or user ID, and the user's password for the host system. For example, in the Host
25 and User dialog **630** depicted in **Figure 6**, the user has specified "stplex4b.stl.ibm.com" **640** as
26 the host system name **645**, "mvs1" **650** as the host system nickname **655**, "COBTSTA" **670** as
27 the MVS user ID **665**, and "*****" **675** as the MVS user's password **650**. After completing
28 these fields, the user may move to the Data Transfer dialog **700** by clicking on either the next
29 button **680** or the Data Transfer tab **685**. Alternatively, the user may click on the Finish button

1 **690** to end the specification after this dialog, or the user may click on the cancel button **695**. to
2 discard the specifications of this dialog.

3
4 Responsive to the user clicking on either the next button **680** or the Data Transfer tab
5 **685**, the user is presented the Data Transfer dialog **700** which allows the user to enter a local
6 code page and a host code page for translation in this connection. The user may also enter a
7 local system drive letter which will be used to map the remote file system to a local drive. In
8 addition, the user may select Connect if the user wants this drive to be automatically connected
9 by default when a remote connection is established with the host system. In the example Data
10 Transfer dialog **700** depicted in **Figure 7**, the user has specified "IBM-850" **710** as the Local
11 Code Page **720**, "IBM-037" **730** as the Host Code Page **740**, "D" **750** as the Drive Letter **760**,
12 and "Y" **770** indicating an automatic default connection **780** for this drive. After completing
13 these fields, the user may move to the Ports dialog **800** by clicking on either the next button
14 **790** or the Ports tab **795**.

15
16 Responsive to the user clicking on either the next button **790** or the Ports **795**, the user
17 is presented the Ports dialog **800** which allows the user to enter port addresses for a Hypertext
18 Transport Protocol (HTTP) server and job port on the MVS host system. In the example Data
19 Transfer dialog **800** depicted in **Figure 8**, the user has specified "80" **810** as the web port **820**
20 and "6715" **830** as the job port **840**. After completing these fields, the user may indicate
21 completion of the connection specification by clicking on the Finish button **850**.

22
23 If the user is defining a new connection for which Directory Setup information has not
24 been specified, then a Directory Setup Wizard **230** displays the Directory Setup window **900**
25 shown in **Figure 9** in response to the user completion of the Add/Modify Connection Wizard
26 dialogs **600**, **700**, and **800**. The Directory Setup window **900** allows the user to enter a host
27 directory path, a transfer type that will apply to this directory, and the type of data set on the
28 MVS system. In the example Directory Setup dialog **900** depicted in **Figure 9**, the user has
29 specified "COBTSTA" **910** as the host directory path **920**, specified "text" **930** as the transfer

1 type **940** which applies to this host directory path **910**, and a default **950** type of data set **960**.
2 After completing these fields **920**, **940**, and **960**, the user may click on the Finish button **970** to
3 complete the Directory Setup processing **230**.

4
5 If the user has not yet specified a mapping between a file within the host directory path
6 on the host file system and a file on the local file system, then a Mapping Setup Wizard **240**
7 displays the Mapping Setup window **1000** shown in **Figure 10** in response to the user
8 completion of the Directory Setup Wizard dialog **900**. The Mapping Setup window **1000**
9 allows the user to enter a local file extension, the pattern describing the host files that the local
10 file extension will be applied to, and a transfer type that defines how data will be transferred
11 between host and workstation for this mapping. In the example Mapping Setup dialog **1000**
12 depicted in **Figure 10**, the user has specified “cpy” **1010** as the local file extension **1020**,
13 “**cobcopy” **1030** as the pattern **1040** describing the host files that the local file extension will
14 be applied to , and “text” **1050** as the transfer type **1060** that defines how data will be
15 transferred between host and workstation for this mapping . After completing these fields, the
16 user may indicate completion of the connection specification by clicking on the Finish button
17 **1070**.

18
19 Upon completion of the definition of a new remote system connection, the Remote
20 System Connections Manager **1100** of **Figure 11** is displayed to the user. The Remote
21 System Connections Manager **1100** comprises three panels: a Remote System Connections
22 Panel **1102**; a Directory Panel **1104**; and a Mapping Panel **1106**. The Remote System
23 Connections Panel **1102** displays a list **1108** of remote system connections defined by the user
24 and the attributes of each. For the remote system connection **1108** defined in the example, the
25 Remote System Connections Panel **1102** displays “mvs1” **1110** as the System nickname **1112**;
26 “stplex4b.stl.ibm.com” **1114** as the MVS system name **1116** ; “COBTSTA” **1118** as the User
27 ID **1120**; “Z” **1122** as the Drive **1124**, “Y” **1126** as the Connect status **1128**; “IBM-1047” **1130**
28 as the Host code page **1132**; and “IBM-850” **1134** as the Local code page **1136**.

1 For a selected remote system connection **1108**, the Directory Panel **1104** displays the
2 host directory path **1138** (“COBTSTA” **1140**) and the transfer type **1142** (“text” **1144**) which
3 applies to this host directory path **1140**. Also for this selected remote system connection **1108**,
4 the Mapping Panel **1106** displays a list **1146** of mappings defined for this remote system
5 connection **1108**, and displays for each defined mapping a local file extension **1148** (“cbl”
6 **1150**), the pattern **1152** (“**cobol” **1154**) describing the host files that the local file extension
7 **1150** will be applied to, and a transfer type **1156** (“text” **1158**) that defines how data will be
8 transferred between host and workstation for this mapping **1160**.

9
10 Referring back to **Figure 2**, the information defining and describing the remote system
11 connection is stored **260** in a data structure, preferably a system XML file, which is illustrated
12 in **Figures 12, 13, 14, 15, 16, and 17**.

13
14 Referring first to **Figure 12**, the preferred embodiment of the data structure is an
15 Extensible Markup Language (XML) file stored in the memory, storage, or both of a computer
16 system. The Document Type Definition (DTD) of the data structure is shown in **Figure 12**,
17 and XML in accordance with this DTD is shown in **Figures 13, 14, 15, 16, and 17**. Referring
18 back to **Figure 12**, the data structure **1200** is hierarchically structured with the storage element
19 foreign file system **1202** (ffs-system) as a highest first-level node in a tree hierarchy. The
20 storage element ffs-system **1202** comprises two second-level nodes in the tree hierarchy:
21 local-system **1204** and system+ **1206**, where local system stores information describing the
22 local file system, and where system+ may be one or more elements each representing and
23 describing a separate foreign file system on a remote host.

24
25 The storage element local-system **1204** further comprises a third-level node in the tree
26 hierarchy: default-local-codepage **1208** which specifies the default codepage in which
27 workstation data is encoded.

28
29 The storage element system+ **1206** further comprises a set of third-level nodes in the

tree hierarchy: system-name **1210**, host **1212**, user **1214**, pass **1216**, job-port **1218**, web-port **1220**, default-host-codepage **1222**, default-local-codepage **1224**, default-transfer **1226**, preferred-drive **1228**, connect **1230**, default-data set-attr **1232**, qualifier-list **1305**, and mapping-list **1310**, where **1305** and **1310** are depicted in **Figure 13**.

The storage element system-name **1210** contains a name comprising an alphanumeric string of characters unique within the Workstation Connection Manager. The storage element host **1212** stores a full TCP/IP name of a remote host or other system that can be resolved to full TCP/IP address by a domain name server (DNS). The storage element user **1214** contains the user ID of the user on the remote host, and the storage element pass **1216** contains the user's password on the remote host.

The storage element job-port **1218** contains an identification of a TCP/IP port for monitoring certain activities other than file system on the host, and the storage element web-port **1220** stores the TCP/IP communication port assigned to the foreign file system on the remote host.

The storage element default-host-codepage **1222** specifies the codepage in which the remote host data is encoded. A codepage is an assignment of graphic characters and control function meanings to all code points; for example, assignment of characters and meanings to 256 code points for an 8-bit code, assignment of characters and meanings to 128 code points for a 7-bit code. The storage element default-local-codepage **1224** specifies the codepage in which workstation data is encoded. The storage element default-transfer **1226** stores the type of transfer of data between the remote host and the local workstation. A binary transfer transmits data unmodified between host and workstation; whereas, a text transfer translates translatable text using host and local code pages from one to another. A transfer usually does not erase data from the original location.

The storage element preferred-drive **1228** contains a drive letter specification normally

1 used on a workstation operating system to uniquely identify the connected file system (for
2 example, C:) to the operating system. The storage element connect **1230** specifies whether or
3 not the workstation drive should be automatically connected when a connection process is
4 started with the remote host.

5
6 The storage element default-data set-attr **1232** comprises a set of attributes associated
7 with the default dataset on the remote host system. The storage element qualifier-list **1305**
8 comprises a set of qualifier names, each being a library-name that is used in a reference
9 together with a text-name associated with that library. The storage element mapping-list **1310**
10 comprises a list, usually in a profile, that establishes a correspondence between items in two
11 groups; for example, a correspondence between file types on the host file system and on the
12 workstation file system.

13
14 The storage element default-data set-attr **1232** further comprises a set of fourth-level
15 nodes in the tree hierarchy: mgmt-class **1234**, storage-class **1236**, (vol-ser | dev-type) **1238**,
16 data-class **1240**, space-units **1242**, avg-rec-unit **1244**, primary-qty **1246**, secondary-qty **1248**,
17 dir-blocks **1250**, recfm **1252**, recl **1254**, blk-size **1256**, name-type **1258**, and exp-date **1260**.

18
19 The storage element mgmt-class **1234** stores a named collection of management
20 attributes describing the retention, backup, or class transition characteristics for a group of
21 objects in a storage hierarchy. The storage element storage-class **1236** contains a named list of
22 storage attributes. The list of attributes identifies a storage service level provided for data
23 associated with the storage class. No physical storage is directly implied or associated with a
24 given storage class name. The storage element (vol-ser | dev-type) **1238** contains the volume
25 serial number and device type. The volume serial number is a number in a volume label
26 assigned when a volume is prepared for use in a system. The device type is the name for a kind
27 of device sharing the same model number.

28
29 The storage element data-class **1240** stores data-related information for the allocation of

the dataset, which may include spaceunits, primary quantity, directory block, record format, record length and dataset name type. The storage element space-units **1242** contains an indication of the units of data storage space used for allocating a dataset; for example: track, cylinders, block, megabyte, or byte. The storage element avg-rec-unit **1244** stores a specification of the unit used when allocating average record length such as K for kilobytes. The storage element primary-qty **1246** stores the number of space units allocated. The storage element secondary-qty **1248** stores the secondary quantity which is related to the space units used in conjunction with the primary quantity when the primary quantity is insufficient for allocation. The storage element dir-blocks **1250** contain 256-byte areas that accommodate or store specific information about datasets. The storage element recfm **1252** contains a specification of the record format which is the definition of how data are structured in the records contained in a file. The record format definition may include record name, field names, and field descriptions, such as length and data type. The storage element recl **1254** contains the record length or record size which specifies the number of characters or bytes in a record. The storage element blk-size **1256** contains the block size or block length which specifies the number of data elements in a block, and is usually specified in units such as records, words, computer words, or characters. The storage element name-type **1258** stores a specification of the type of storage element, and is usually either a partitioned dataset (PDS), a partitioned dataset extended (PDSE), or a sequential dataset. The storage element exp-date **1260** contains the expiration date, the date at which a file is no longer protected against automatic deletion by the system.

Referring now to **Figure 13**, the storage element qualifier-list **1305** further comprises a set of fourth-level nodes in the tree hierarchy: qualifier+ **1315**, where qualifier+ **1315** may be one or more elements each representing and describing a separate qualifier **1320**. Each qualifier **1320** further comprises a set of fifth-level nodes or storage elements in the tree hierarchy: qualifier-name **1325**, directory **1330**, transfer **1335**, host-codepage **1340**, local-codepage **1345**, and data set-attr **1350**. The storage element qualifier-name **1325** stores a name modifier such as a library-name that is used in a reference together with a text-name

1 associated with that library to make the name unique. The storage element directory **1330**
2 stores a higher middle-level qualifier whose name is used to attach the host file system to the
3 workstation file system. The storage element transfer **1335**, the storage element host-codepage
4 **1340**, the storage element local-codepage **1345**, the storage element data set-attr **1350**, and the
5 storage element transfer **1335** may contain overrides of the above defaults for this particular
6 qualifier.

7
8 The storage element mapping-list **1310** further comprises a set of fourth-level nodes in
9 the tree hierarchy: mapping+ **1355**, where mapping+ **1355** may contain one or more elements
10 each representing and describing a separate mapping **1360**. Each storage element mapping
11 **1360** further comprises a set of fifth-level nodes in the tree hierarchy: local-ext **1365**,
12 host-name **1370**, transfer **1375**, host-codepage **1380**, and local-codepage **1385**. The storage
13 element local-ext **1365** contains a local workstation file extension that is used to map to a host
14 file name. The storage element host-name **1370** stores a host dataset name pattern which is
15 used to map PDS members to workstation file format. The pattern consists of normal data-set-
16 name characters plus wild characters (such as an asterisk *). For example, the pattern
17 “*.COB*” matches data-set names whose low-level qualifier starts with “COB” (such as
18 “COB”, “COBOL”, and “COBCOPY”).

19
20 Referring now to **Figures 14, 15, 16, and 17**, an XML system file **1400** in accordance
21 with the DTD **1200** of the preferred embodiment is shown. The information describing the
22 example remote system connection defined in **Figures 6, 7, 8, 9, 10, 11, and 12** may be stored
23 in the memory and storage **14** of the computer system **12** with the use of the XML system file
24 data structure **1400**. **Figure 14** shows that portion **1400** of the data structure storing the
25 ffs-system **1402**, the local-system **1404**, and the system **1406**.

26
27 The local-system **1404** stores the “IBM-850” **1408** entered into the Local Code Page
28 **720** field as the default-local-codepage **1410**. The system **1406** stores:
29 o “ffs1” **1412** as the system-name **1414**,

- o “stplex4b.stl.ibm.com” **1416** entered into the MVS System Name field **640** as the host **1418**,
- o “COBTSTA” **1420** entered into the MVS User field **670** as the user **1422**,
- o “sol1test” **1424** entered into the MVS Password field **675** as the pass **1426**,
- o “6715” **1428** entered into the Job Port field **830** as the job-port **1430**,
- o “80” **1432** entered into the Web Port field **810** as the web-port **1434**,
- o “IBM-037” **1436** entered into the Host Code Page field **730** as the default-host-codepage **1438**,
- o “IBM-850” **1440** entered into the Local Code Page field **710** as the default-local-codepage **1442**,
- o “text” **1444** entered into the Transfer Type field **930** as the transfer **1446**,
- o “D:” **1448** entered into the Drive Letter field **750** as the preferred-drive **1450**, and
- o “y” **1452** entered into the Connect field **770** as the connect **1454**.

Figure 15 shows that portion **1500** of the data structure storing the qualifier-list **1502** which in this example comprises two qualifiers: “COBTSTA” **1504** and “COBTST.UTIL” **1506**. The first qualifier **1504** stores:

- “COBTSTA” **1508** entered into the Connect field **910** as the qualifier-name **1510**,
- “MVS” **1512** as the qualifier-type **1514**,
- “COBTSTA” **1516** entered into the Directory field **910** as the directory **1518**, and
- “text” **1520** entered into the Transfer field **930** as the transfer **1522**.

The first qualifier **1504** also stores in the storage element data set-attr **1524**:

- nulls for mgmt-class **1526**, storage-class **1528**, dev-type **1530**, and data-class **1532**, and
- “BLKS” **1534** as the space-units **1536**,
- “M” **1538** as the avg-rec-unit **1540**,
- “10” **1542** as the primary-qty **1544**,
- “10” **1546** as the secondary-qty **1548**,
- “20” **1550** as the dir-blocks **1552**,
- “FB” **1554** as the recfm **1556**,

“80” 1558 as the recl 1560,
“3120” 1562 as the blk-size 1564,
“PDS” 1566 as the name-type 1568, and
“2001/12/31” 1570 as the exp-date 1572.

Corresponding information is also stored in the second qualifier “COBTSTA.UTIL”
1506.

Figures 16 and 17 show that portion 1600 of the data structure storing the mapping-list
1610 which for each mapping stores a local file extension, a pattern describing the host files
that the local file extension will be applied to, and a transfer type that defines how data will be
transferred between host and workstation for this mapping. In the example Mapping Panel
1106 of the Remote Host Connections Manager 1100 depicted in Figure 11, the user has
entered ten mappings specifying local-ext 1620, host-name 1630, and transfer 1640 for each
mapping. These mappings are stored in the XML file data structure 1600 as follows:

<local-ext> 1620	<host-name> 1630	<transfer> 1640
cbl	**cobol	text
cpy	**cobcopy	text
pli	**pli	text
obj	**obj	binary
exe	**load	binary
cmd	**clist	text
cmd	**sigyclst	text
jcl	**cntl	text
lst	**listing	text
out	**outlist	text

Using the foregoing specification, the invention may be implemented using standard

1 programming and/or engineering techniques using computer programming software, firmware,
2 hardware or any combination or sub-combination thereof. Any such resulting program(s),
3 having computer readable program code means, may be embodied within one or more
4 computer usable media such as fixed (hard) drives, disk, diskettes, optical disks, magnetic tape,
5 semiconductor memories such as ROM, Proms, etc., or any memory or transmitting device,
6 thereby making a computer program product, i.e., an article of manufacture, according to the
7 invention. The article of manufacture containing the computer programming code may be made
8 and/or used by executing the code directly or indirectly from one medium, by copying the code
9 from one medium to another medium, or by transmitting the code over a network. An
10 apparatus for making, using, or selling the invention may be one or more processing systems
11 including, but not limited to, cpu, memory, storage devices, communication links,
12 communication devices, servers, I/O devices, or any sub-components or individual parts of one
13 or more processing systems, including software, firmware, hardware or any combination or
14 sub-combination thereof, which embody the invention as set forth in the claims.

15
16 User input may be received from the keyboard, mouse, pen, voice, touch screen, or any
17 other means by which a human can input data to a computer, including through other programs
18 such as application programs.

19
20 One skilled in the art of computer science will easily be able to combine the software
21 created as described with appropriate general purpose or special purpose computer hardware to
22 create a computer system and/or computer sub-components embodying the invention and to
23 create a computer system and/or computer sub-components for carrying out the method of the
24 invention. Although the present invention has been particularly shown and described with
25 reference to a preferred embodiment, it should be apparent that modifications and adaptations
26 to that embodiment may occur to one skilled in the art without departing from the spirit or
27 scope of the present invention as set forth in the following claims.

CLAIMS

We claim:

1 1. A method for providing information describing a file system connection between a local
2 system and a host system, said method comprising:

3 encoding the information in a metalanguage format comprising one or more
4 tags, each tag having an identifier and a set of one or more attributes, wherein the
5 encoded information comprises a file system connection descriptor; and
6 parsing the project topology descriptor according to the metalanguage tags.

1 2. A data structure embodied in a computer-readable storage medium, said data structure
2 representing information describing a file system connection between a local file system
3 located on a local system and a host file system located on a host system, wherein said data
4 structure comprises a file system connection descriptor, said file system connection descriptor
5 comprising:

6 a local system data structure representing the local file system;
7 a host system data structure representing the host file system; and
8 a mapping data structure representing a mapping between the local file system
9 and the host file system.

1 3. The file system connection descriptor of claim 2 wherein the mapping data structure
2 comprises:

3 a local file extension data structure storing a local file extension;
4 a host file pattern data structure storing a pattern describing a host file to which
5 the local file extension will be applied; and
6 a transfer type data structure storing a transfer type that defines how data will be
7 transferred between the host system and the local system for this mapping.

1 4. The file system connection descriptor of claim 3 wherein the mapping data structure
2 further comprises:

3 a host codepage data structure storing an identification of a host codepage in
4 which data in the host file is encoded; and

5 a local-codepage data structure storing an identification of a local codepage in
6 which data in a local file is encoded.

1 5. The file system connection descriptor of claim 2 wherein the host system data structure
2 comprises:

3 a data structure storing an identification of the host system;

4 a data structure storing an identification of a user of the host system;

5 a data structure storing an identification of a preferred drive on the local system;

6 and

7 a data structure storing an indication that the preferred drive be automatically
8 connected by default when a remote connection is established with the host system.

1 6. The file system connection descriptor of claim 2 wherein the host system data structure
2 further comprises:

3 a data structure storing an identification of a list of qualifier data structures, wherein
4 each qualifier data structure stores a qualifier name, a name identifying a directory on
5 the host system, and an identification of file attributes of a file located in the host
6 system directory.

1 7. The file system connection descriptor of claim 2 encoded in a tagged metalanguage
2 document comprising one or more tags, each tag having an identifier and a set of one or more
3 attributes.

ABSTRACT

**METHOD OF, SYSTEM FOR, AND COMPUTER PROGRAM PRODUCT FOR
PROVIDING A DATA STRUCTURE FOR CONFIGURING CONNECTIONS
BETWEEN A LOCAL WORKSTATION FILE SYSTEM AND A REMOTE HOST
FILE SYSTEM**

A data structure embodied in a computer-readable storage medium for configuring connections from a local workstation between a file system residing on the local workstation and a file system residing on a remote host system. The data structure provides for such configuration by allowing the user to specify the host system, specify a host directory path within the host file system, and specify a mapping between a file within the host directory path on the host file system and a file on the local file system. After such configuration, the user may access the host file system file in the same manner as a local file system file. The data structure can encode information describing a file system connection between a local system and a host system in a metalanguage format comprising one or more tags, each tag having an identifier and a set of one or more attributes, wherein the encoded information comprises a file system connection descriptor which can be parsed according to the metalanguage tags.



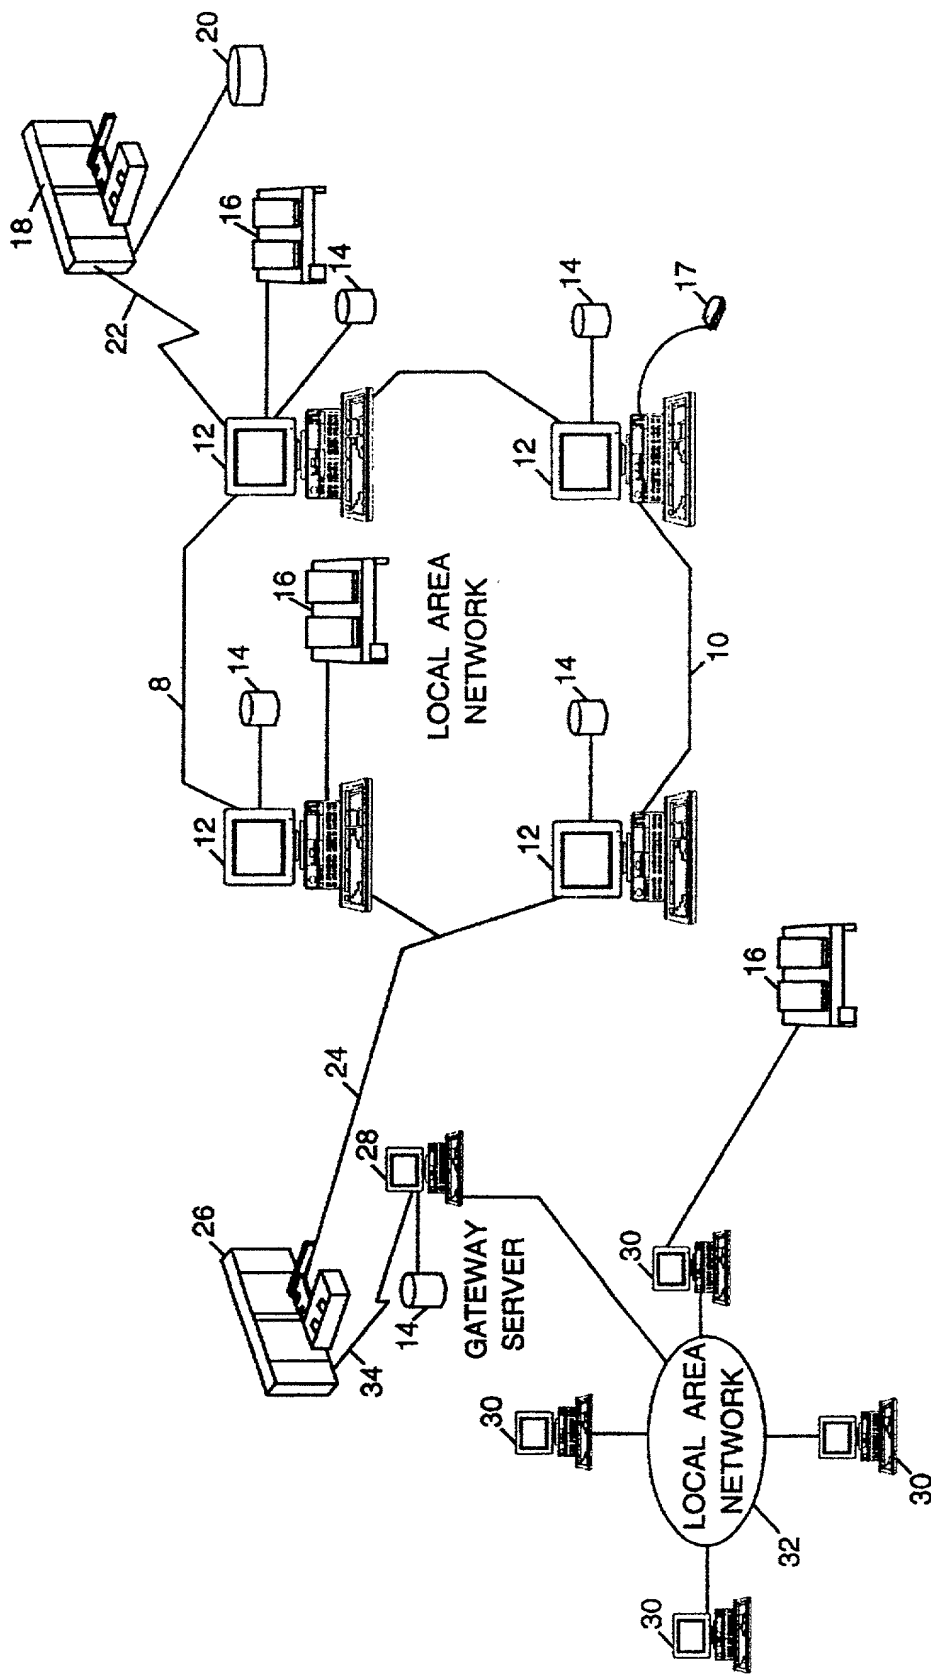


FIG. 1

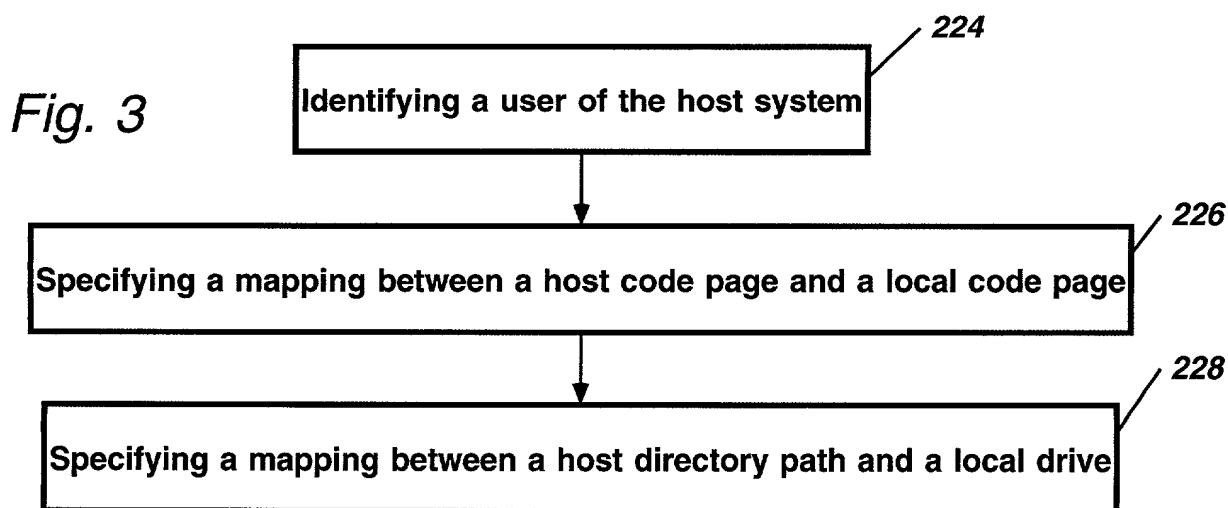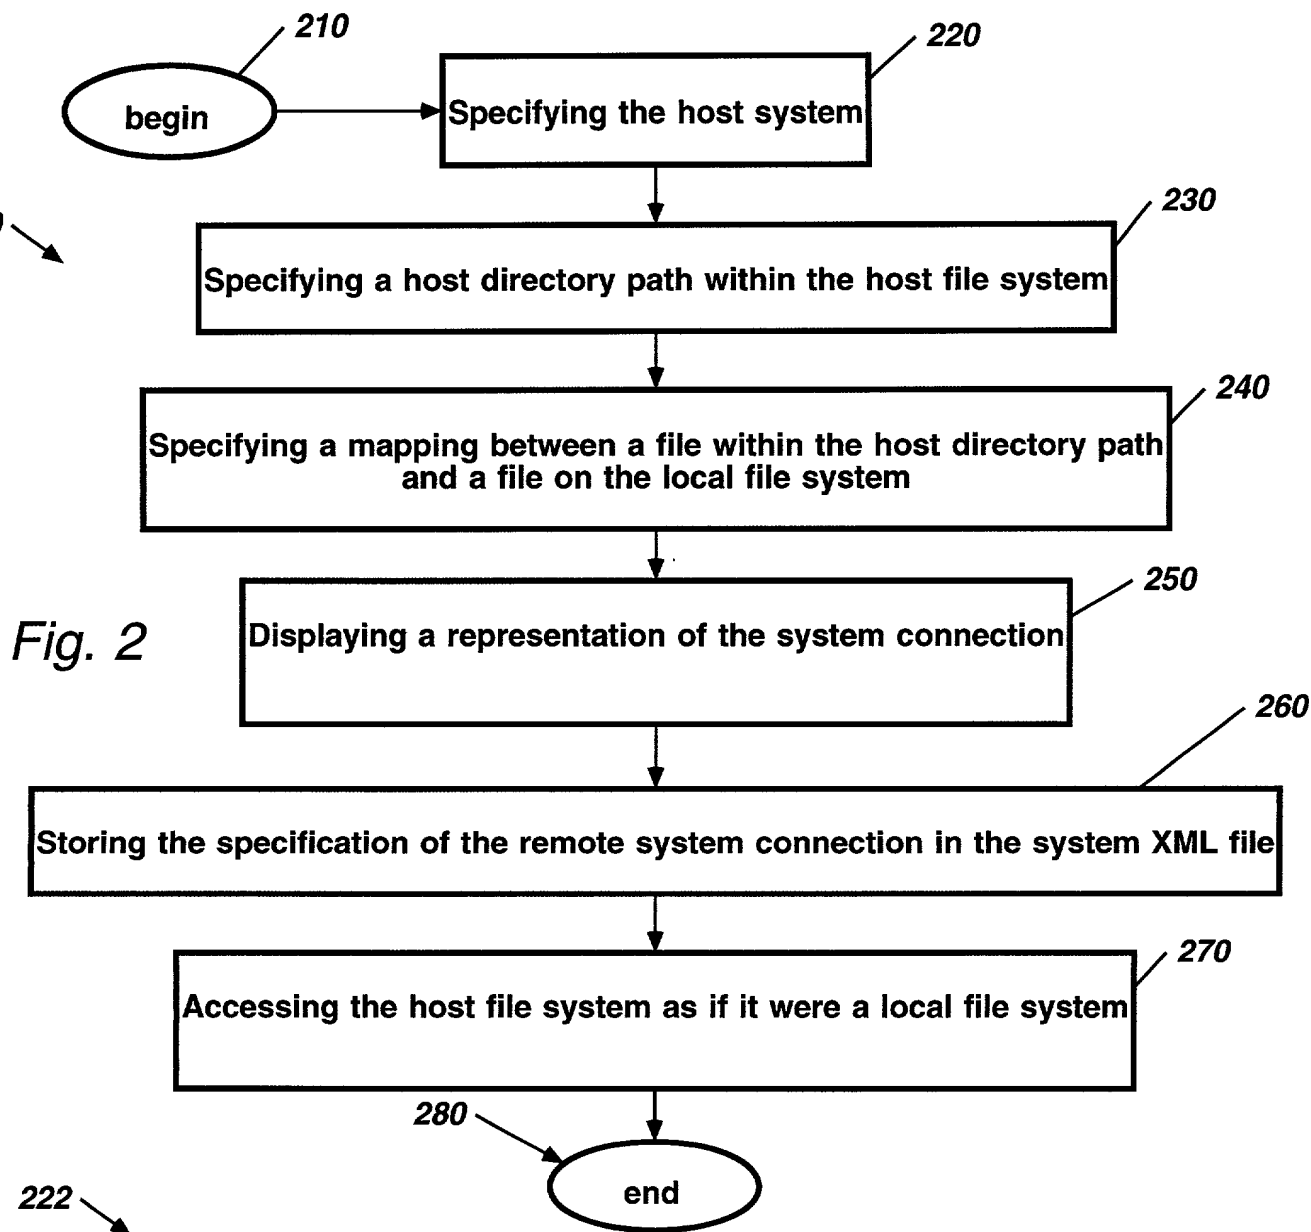

242

244
Specifying a local file extension type

246

Specifying a pattern describing host files to which the local file extension will be applied

248

Specifying a data transfer type applicable to the mapped host files conforming to the pattern

Fig. 4

005250-1936250

272

274
Displaying in a first portion of a display a visual indicia representing the host system

276

Displaying in a second portion of the display a visual indicia representing the host directory and the converted and mapped local file within the local directory path

278

Displaying in a third portion of the display a visual indicia representing the mapping between a file within the host directory path and a file within the local file system

Fig. 5

Add/Modify Connection

1. Host and User 2. Data Transfer 3. Ports

First Step: Host and User
 Choose a nickname for your MVS system nickname.
 MVS system name is the TCP/IP host name of the remote host.
 Enter your user ID and password for that system.

MVS system name: stplex4b.stl.ibm.com System nickname: mvs1
 For example: mvs1.ibm.com For example: mymvs

MVS User ID: COBTSTA
 MVS Password: *****

Next Finish Cancel

Fig. 6

Add/Modify Connection

1. Host and User 2. Data Transfer 3. Ports

Step 2 of 3: Data Transfer
 Enter local and host translation code page for this connection. If you don't know what your local or host translation code page is, contact your system administrator. The drive letter will be used to map the remote file system to a local drive. Select "Connect" if you want this drive to be connected by default when you connect to your systems.

Local Code Page: IBM-850
 Host Code Page: IBM-037
 Drive Letter: D:
 Connect: Y

Back Next Finish Cancel

Fig. 7

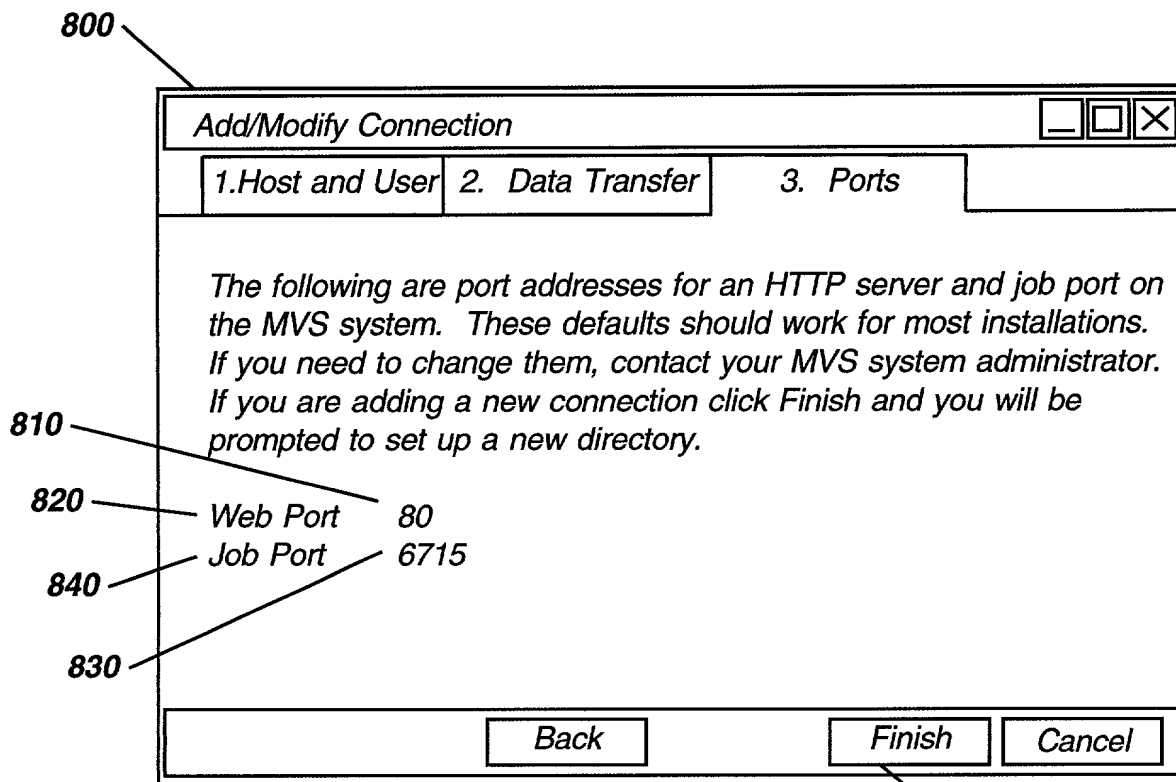


Fig. 8

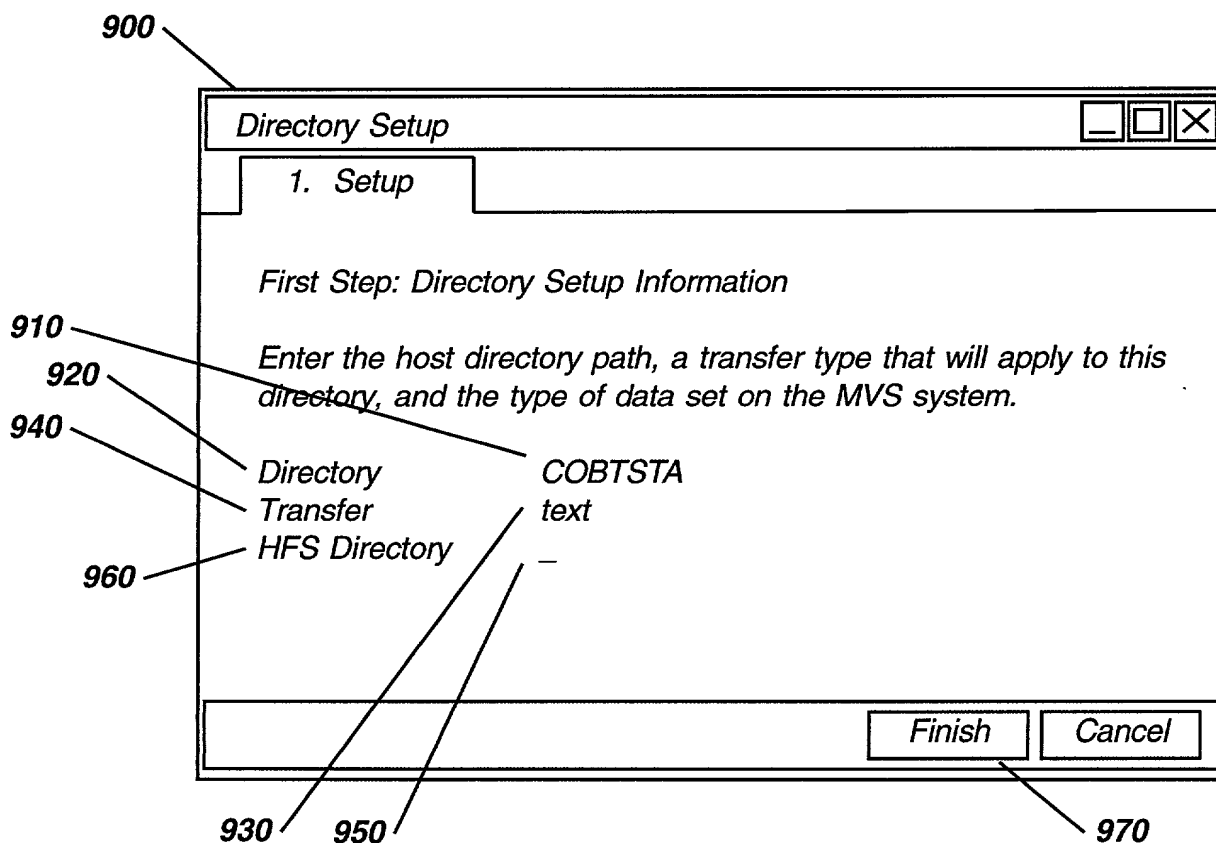


Fig. 9

1000

Add/Modify Connection

1. Mapping

First Step: Mapping Setup Information

Enter local file extension, the pattern describing the host files that the local file extension will be applied to, and a transfer type that defines how data will be transferred between host and workstation for this mapping.

Local cpy
Host **cobcopy
Transfer text

Finish Cancel

1050

1030

Fig. 10

1070

Remote System Connections

File Edit View Job Help

System nickname	MVS system name	User ID	Drive	Connect	Host code page	Local code page
mvs1	stplex4b.stl.ibm.com	COBTSTA	Z:	y	IBM-1047	IBM-850

Directory	Transfer Type	Local Files	Host Files	Transfer type
COBTSTA	text	cbl	**cobol	text
		cpy	**cobcopy	text
		pli	**pli	text
		obj	**obj	binary
		exe	**load	binary
		cmd	**clist	text
		cmd	**sigyclst	text
		jcl	**cntl	text
		lst	**listing	text
		out	**outlist	text

Fig. 11

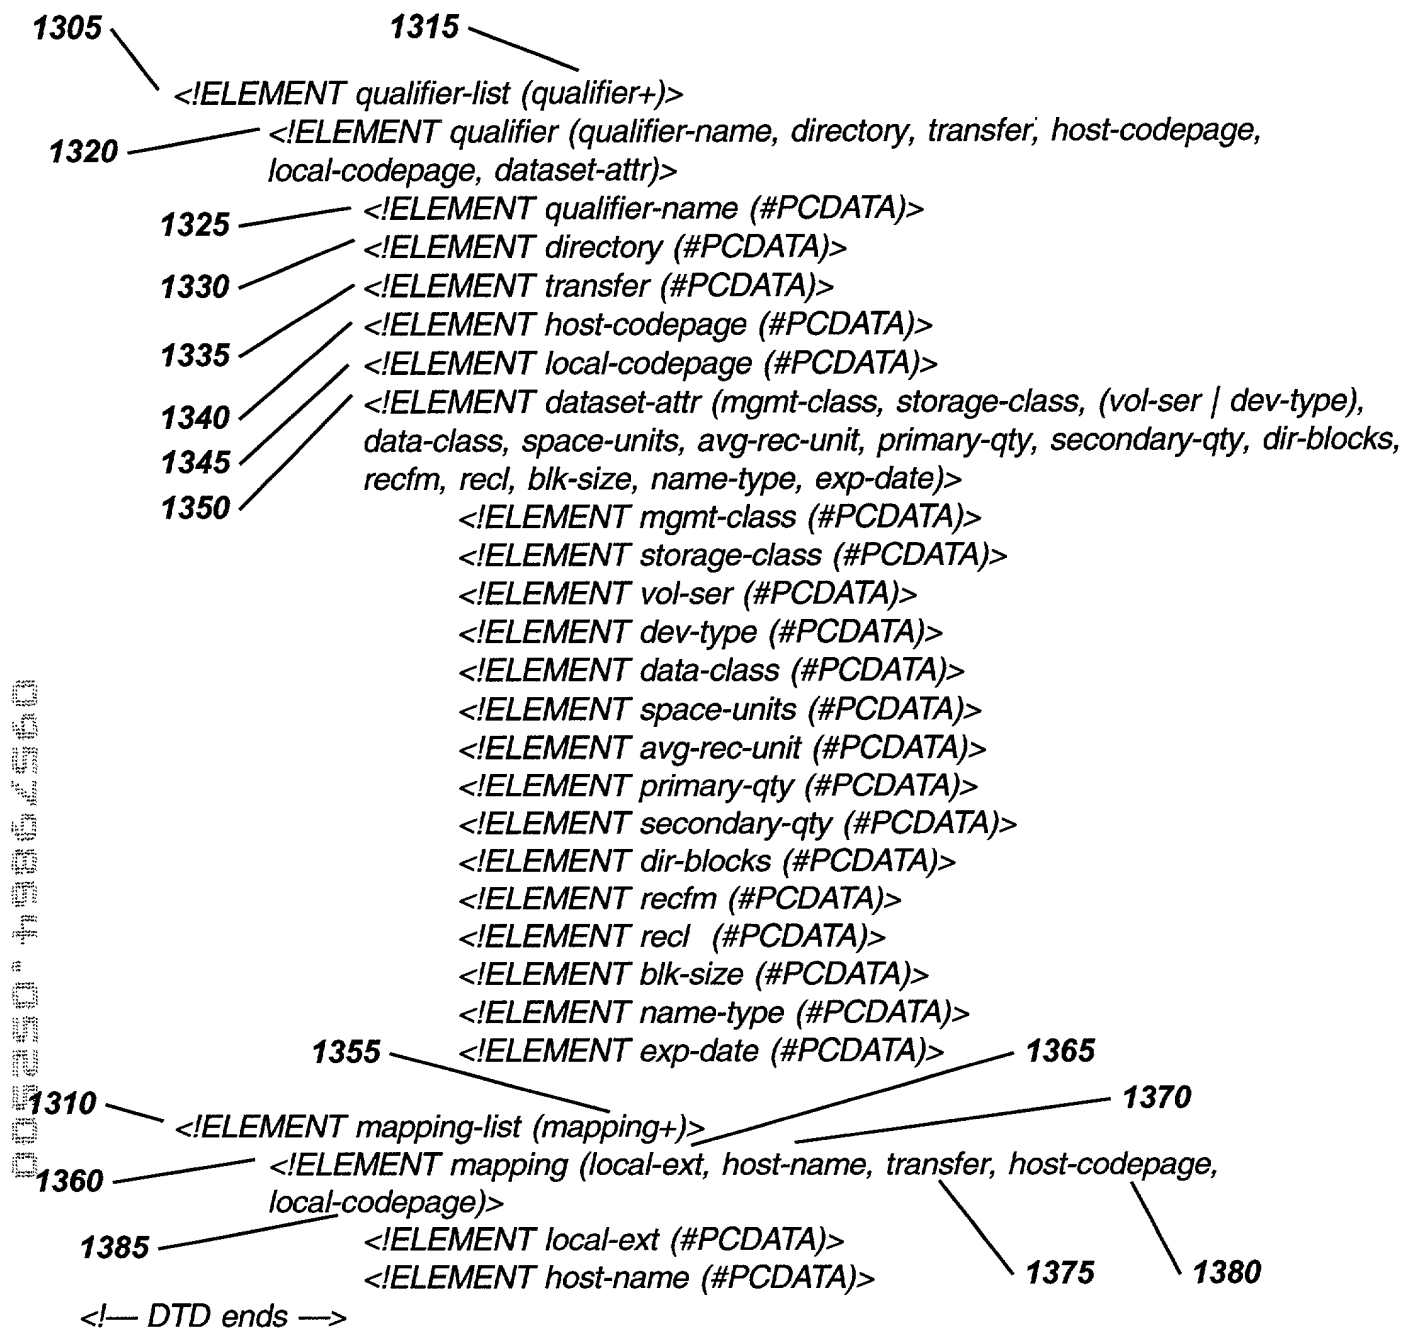


Fig. 13

005250" +9862560

1400 ↘

```
<!-- XML Starts -->
<?xml version="1.0" encoding="US-ASCII">
1402 <!DOCTYPE ffs-system SYSTEM "e:\IBMFFS\BIN\ffs_sys.dtd">
1404 <ffs-system>
1406   <local-system>
1410     <default-local-codepage>IBM-850</default-local-codepage>
1408   </local-system>
1414   <system>
1412     <system-name>ffs1</system-name>
1416     <host>stplex4b.stl.ibm.com</host>
1420     <user>COBTSTA</user>
1426     <pass>sol1test</pass>
1428     <job-port>6715</job-port>
1434     <web-port>80</web-port>
1432     <default-host-codepage>IBM-037</default-host-codepage>
1436     <default-local-codepage>IBM-850</default-local-codepage>
1442     <transfer>text</transfer>
1440     <preferred-drive>D:</preferred-drive>
1444     <connect>y</connect>
1448     <default-dataset-attr>
1452       <mgmt-class> </mgmt-class>
       <storage-class> </storage-class>
       <dev-type> </dev-type>
       <data-class> </data-class>
       <space-units>TRKS</space-units>
       <avg-rec-unit>M</avg-rec-unit>
       <primary-qty>10</primary-qty>
       <secondary-qty>10</secondary-qty>
       <dir-blocks>20</dir-blocks>
       <recfm>FB</recfm>
       <recl>80</recl>
       <blk-size>3120</blk-size>
       <name-type> </name-type>
       <exp-date> </exp-date>
     </default-dataset-attr>
```

Fig. 14

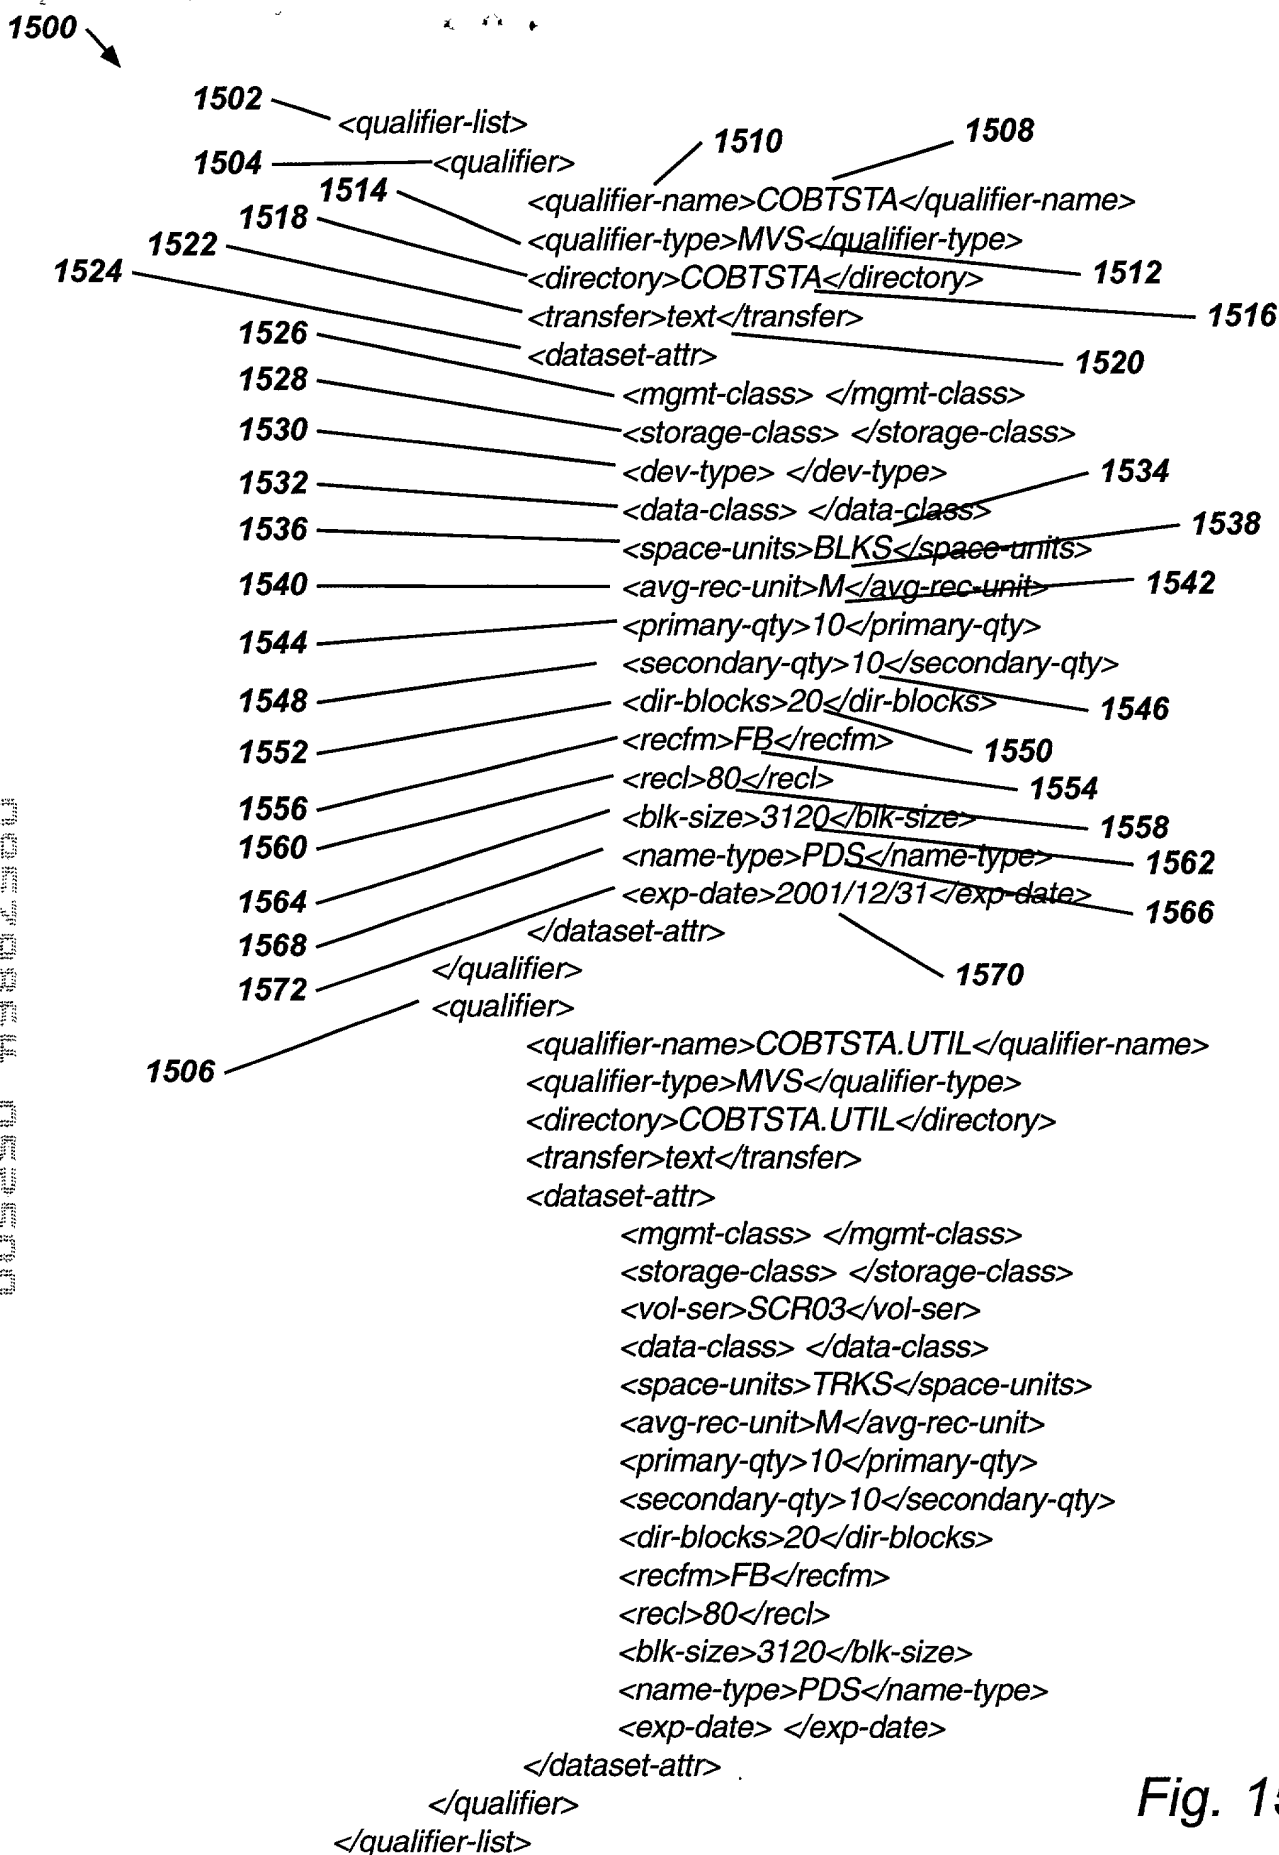


Fig. 15

```

1610 <mapping-list>
      <mapping>
1620         <local-ext>cbl</local-ext>
            <host-name>**cobol</host-name>
            <transfer>text</transfer>
1630         </mapping>
1640         <mapping>
            <local-ext>cpy</local-ext>
            <host-name>**cobcopy</host-name>
            <transfer>text</transfer>
        </mapping>
        <mapping>
            <local-ext>pli</local-ext>
            <host-name>**pli</host-name>
            <transfer>text</transfer>
        </mapping>
        <mapping>
            <local-ext>obj</local-ext>
            <host-name>**obj</host-name>
            <transfer>binary</transfer>
        </mapping>
        <mapping>
            <local-ext>exe</local-ext>
            <host-name>**load</host-name>
            <transfer>binary</transfer>
        </mapping>
        <mapping>
            <local-ext>cmd</local-ext>
            <host-name>**clist</host-name>
            <transfer>text</transfer>
        </mapping>
        <mapping>
            <local-ext>jcl</local-ext>
            <host-name>**jcl</host-name>
            <transfer>text</transfer>
        </mapping>
        <mapping>
            <local-ext>cmd</local-ext>
            <host-name>**sigyclst</host-name>
            <transfer>text</transfer>
        </mapping>
    </mapping-list>

```

Fig. 16

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

Fig. 17